



RIGHT OF WAY DIVERSION PLAN

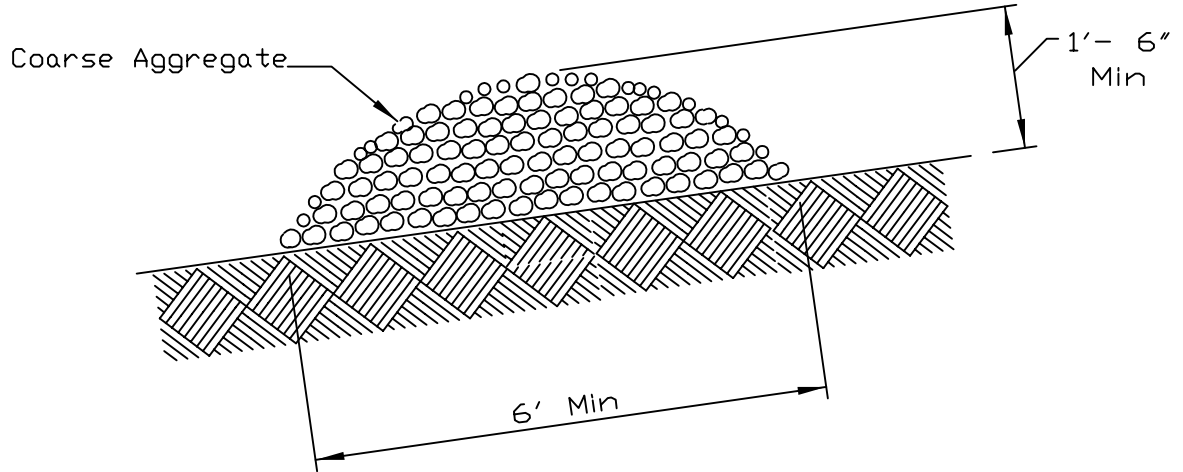

TYPICAL GRAVEL STRUCTURE

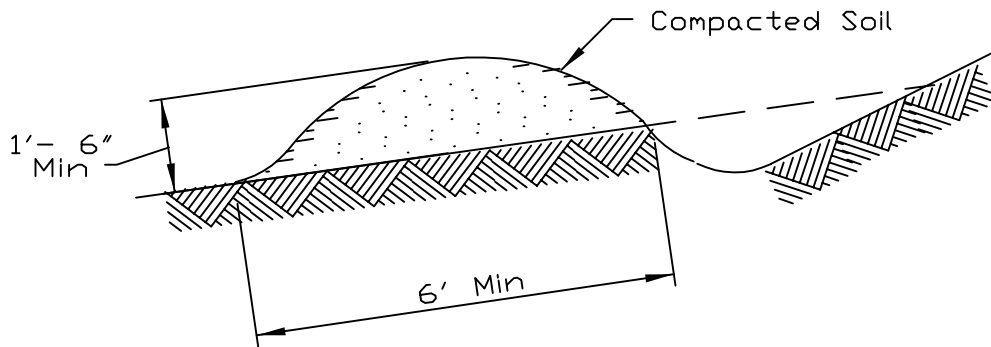

TYPICAL EARTHEN STRUCTURE

NOTES:

1. Install the diversion as soon as right-of-way has been cleared and graded.
2. Disc the base for the constructed ridge before placing fill.
3. Track the ridge to compact it to the design cross section.
4. Locate the outlet on an undisturbed area. Adjust field spacing of the diversion to use the most stable outlet areas. When natural areas are not deemed satisfactory, provide outlet protection.
5. Immediately seed and mulch the portions of the diversions not subject to construction traffic. Stabilize with gravel areas to be crossed by vehicles.
6. Coarse aggregate, if used, shall meet one of the following IDOT gradations: CA-1, CA-2, CA-3, OR CA-4.

REFERENCE	
Project	_____
Designed	_____ Date _____
Checked	_____ Date _____
Approved	_____ Date _____



STANDARD DWG. NO.
IL-600
SHEET 1 OF 1
DATE 3-3-95